



## Dh- 2CE56A2P-IT1 700TVL DIS EXIR Dome Camera

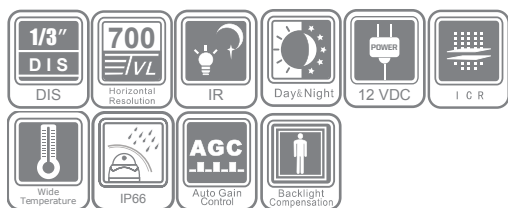

### Key features

- 700 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6/8 mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Wide Operating Temperature Range:  
-40°C to 60°C (-40°F to +140°F)

### Dimensions

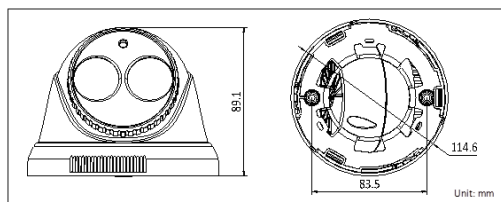

DB-2CE56A2P-IT1	
<b>Camera</b>	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	976 (H) × 496 (V)
Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	3.6 mm (2.8mm, 6mm, 8mm optional)
	Angle of view: 68.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
BLC	On
<b>General</b>	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 5 W
Ingress Protection	IP66
IR Range	20 meters
Dimensions	Φ114.6× 89.1mm(Φ4.5" × 3.5")
Weight	300 g (0.66 lbs)