


DP-2116NI-SN/P

Embedded Mini Plug & Play NVR


DUNLOP
By Hikvision Digital Technology

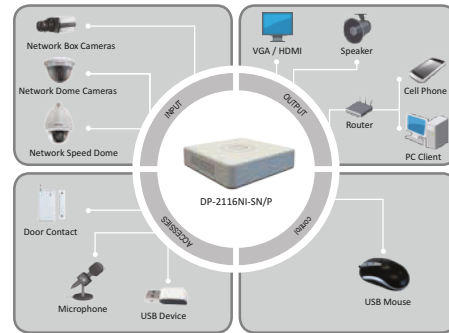


Key features

- Third-party network cameras supported
- Up to 2 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- HDD quota and group management
- 4/8 independent PoE network interfaces are provide

Rear Panel of DP-2104/08/16NI-SN/P

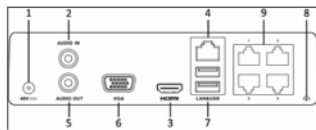

DS-7104NI-SN/P



DS-7108&7616NI-SN/P

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. PoE Ethernet Interface

DP-2116NI-SN/P	
Video/Audio input	
Video input	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	100Mbps
Outgoing bandwidth	40Mbps
Remote connection	128
Video/Audio output	
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Live view / Playback resolution	1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF
Capability	8-ch@4CIF, 8-ch@720P, 4-ch@1080P
Hard disk	
SATA	1 SATA interface for 1 HDD
Capacity	Up to 4TB for each disk
External interface	
Network interface	1 RJ-45 10 /100/1000 Mbps self-adaptive Ethernet interface
USB interface	2 × USB 2.0
PoE	
Interface	8 independent 10 /100 Mbps PoE Ethernet interfaces
Max. Power	40W
Supported Standard	AF
Others	
Power supply	48V DC
Consumption (without hard disk and PoE)	≤ 15 W
Working temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)
Working humidity	10 % ~ 90 %
Chassis	1U chassis
Dimensions(W × D × H)	285 × 210 × 45 mm
Weight	≤ 1 Kg (without hard disk)