


## SC-I142V-SZ

4 MP Motorized Zoom Lens Network Dome Camera



### Key Features

- Up to 4 Megapixel high resolution
- H.265 / H.264 video formats
- POE & DC 12V integration design
- 2.8~12mm motorized zoom lens
- ABF (Auto back focus)
- Up to 30 meter IR range
- Dual video streams
- 80dB Wide Dynamic Range
- 3D Digital Noise Reduction
- IP66 weather-proof protection
- Support IE, Chrome, Safari, Firefox
- Latest ONVIF V2.4.1 supported
- Browser plug-in free

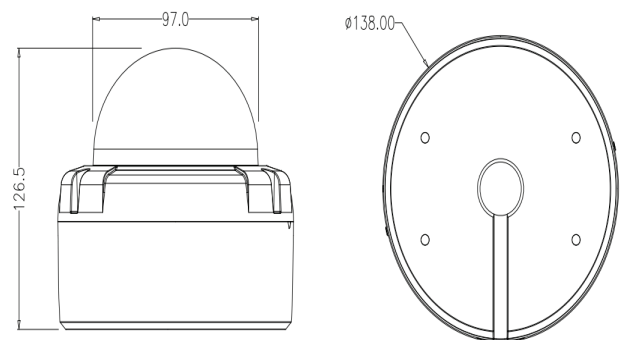

## Specifications

<b>Camera</b>	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	Color: 0.01Lux @ (F1.6) ,B/W: 0 Lux with IR
Lens	2.8~12mm motorized zoom lens
Day &Night	IR cut filter with auto switch
DNR	3D DNR
Wide Dynamic Range	80dB
P&T rotation	Pan: 0° ~ 355°, Tilt: 0° ~ 90°, Rotation: 0° ~ 30°
<b>Compression Standard</b>	
Video Compression	H.265 / H.264
Dual streams	Support
<b>Image</b>	
Max. Resolution	2560 x 1440
Frame Rate	50Hz: 25fps(2560 x 1440, 1920 x 1080) 60Hz: 25fps(2560 x 1440, 1920 x 1080)
Image Setting	DWDR, ABF,Compression, Rotate mode, Saturation, Brightness, Contrast
ROI Codec	Support, 8 regions
<b>Network</b>	
Alarm Trigger	Motion detection, Network disconnect, IP address conflict
Standards	ONVIF (PROFILE S, PROFILE G), CGI, RTSP, RTMP
<b>Interface</b>	
Communication	1 RJ45 100M/1000M Ethernet port
On-board storage	Build-in Micro SD/SDHC/SDXC slot, up to 128GB
Alarm interface	1x Alarm I/O
Audio interface	1x Audio in
<b>General</b>	
Operating Conditions	Temperature: -30°C – 60°C (-22°F – 140°F)
	Humidity: 95% or less (non-condensing)
Power Supply	DC12V ± 10%, PoE (802.3af)
Power Consumption	Max. 8W
IR Range	Approx. 30 meters (100 feet)
Ingress Protection	IP66
Dimensions	Φ138 × 126.5 (5.4" × 5")