


DP-22DE7174-A

1.3MP IR PTZ Dome Network Kamera

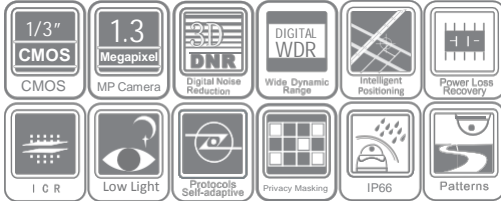

Genel Özellikler

- 1/3" Progressive Scan CMOS
- 1280 x 960 HD çözünürlük
- 20X optik zum, 16X dijital zum
- 100m IR mesafesi
- True Day/Night, 3D DNR, Dijital WDR
- 3D akıllı konumlama
- 24VAC / High-PoE güç kaynağı desteği

DP-22DE7174-A	
Camera	
Image Sensor	1/3" Progressive Scan CMOS
Effective Pixel	1320K pixels
Min. Illumination	Color: 0.05Lux@(F1.4, AGC ON); B/W: 0.01Lux@(F1.4, AGC ON); 0 Lux with IR
White Balance	Auto / Manual /ATW/Indoor/Outdoor/Daylight lamp/Sodium lamp
AGC	Auto / Manual
S / N Ratio	≥ 50dB
Digital Noise Reduction	3D DNR
Backlight Compensation	BLC
Wide Dynamic Range	128X Digital WDR
Shutter Speed	1 ~ 1/10,000s
Day & Night	IR Cut Filter
Digital Zoom	16X
Focus Mode	Auto / Semiautomatic / Manual
Lens	
Focal Length	4.7 ~ 94.0mm, 20x
Zoom Speed	Approx 3s(Optical Wide-Tele)
Angle of View	58.3 ~ 3.2 degree (Wide-Tele)
Min. Working Distance	10 ~ 1,000mm(Wide-Tele)
Aperture Range	F1.4 ~ F3.5
Pan and Tilt	
Range	Pan: 360° endless; Tilt: 15° ~ 90° (Auto Flip)
Speed	Pan Manual Speed: 0.1° ~ 160°/s, Pan Preset Speed: 240°/s Tilt Manual Speed: 0.1° ~ 120°/s Tilt Preset Speed: 200°/s
Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
Number of Preset	256
Patrol	8 patrols, up to 32 presets per patrol
Park action	Pattern/Pan scan/Tilt scan/Frame scan/Panorama scan/Random scan
Power-off Memory	Support
Infrared	
IR Distance	Up to 100m
IR Intensity	Automatically adjusted, depending on the zoom ratio
Input/Output	
Audio Input	Optional audio input (LINE input), 2 ~ 2.4V[p-p]; output impedance: 1KΩ, ±10%
Audio Output	Line level, impedance: 600Ω
Network	
Ethernet	10Base-T / 100Base-TX, RJ45 connector
Max. Image Resolution	1280x960
Frame Rate	60Hz:30fps(1280x960), 30fps (1280x720)
Image Compression	H.264/MPEG4
Audio Compression	G.711u /G.711a /G.726
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x,Qos, FTP,SMTP,UPnP,SNMP,DNS,DDNS,NTP,RTSP,RTP,TCP,UDP,IGMP,ICMP,DHCP,PPPoE
Simultaneous Live View	Up to 6
Streams	Dual Streams
Mini SD Memory Card	Micro SD Slot, up to 32GB
User/Host Level	Up to 32 users,3 Levels: Administrator, Camera control, Live view only
Security Measures	User authentication (ID and PW), Host authentication (MAC address), IP address filtering
Integration	
Application programming	Open-ended API, support Onvif, PSIA and CGI
Web Browser	IE 7, IE8, IE9, Chrome8+, Firefox3.5+, Safari5+
General	
RS-485 Protocols	HIKVISION, Pelco-P, Pelco-D, self-adaptive
Power	24 VAC / High-PoE; Max. 30W/21W (IR On / Off)
Working Temperature	-30°C~65°C
Humidity	90% or less
Protection Level	IP66 standard TVS 4,000V lightning protection, surge protection and voltage transient protection
Dimensions	Φ220 × 353.4mm (Φ8.66" x 13.91")
Weight (approx.)	5.5kg(12.13lbs)