


Zoom 5554A Modem Port Açma Ayarları

Zoom 5554A Modemlerde Port açmak için;

İnternet Explorer adres satırına **http://10.0.0.2** yazarak enter butonuna basınız



Karşınıza şifre ekranı gelecektir ve bu ekranda **Kullanıcı Adı : admin** ve **Şifre** bölümüne **zoomadsl** yazarak **OK** butonuna basınız.

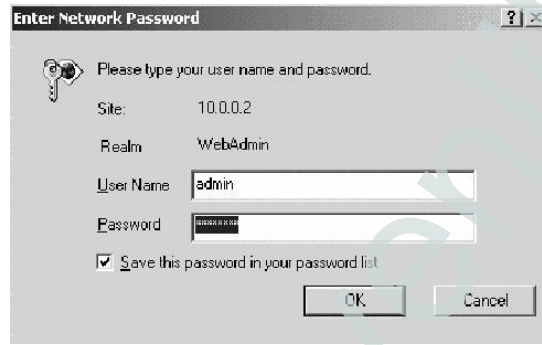

Karşınıza aşağıdaki **Basic Setup** Menüsü çıkacaktır. Bu menüden **Advanced Setup** ardından **NAT** bölümünü seçiniz.



Karşınıza **Network Address Translation (NAT) Rule Configuration** Menüsü çıkacaktır. Burda en son girilmiş **Rule ID** değerine bakın. Bu örnekte son girilen **Rule ID** değeri 5, sizde farklı olabilir bu değeri aklınızda tutun. Sonra **NAT Option** 'dan **NAT Rule Entry** 'i seçip **Add** butonuna basın.

Network Address Translation (NAT) Rule Configuration

NAT Options: NAT Rule Entry

Rule ID	IF Name	Rule Flavor	Protocol	Local IP From	Local IP To	Action
1	ALL	NAPT	ANY	0.0.0.0	255.255.255.255	Stats
2	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
3	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
4	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
5	ppp-0	RDR	TCP	10.0.0.4	10.0.0.4	Stats

Add

After you have saved your changes, you must write the new settings to flash to make them permanent. Click the button below to do this.

Write Settings to Flash

Karşınıza aşağıdaki **NAT Rule - Add** Menüsü çıkacaktır. **Rule ID** bölümüne üsteki son numaranın bir üstünü yazın **Protocol** Bölümünden **TCP** 'yi seçin **Local Address** bölümlerine PC, DVR veya IP kameranın IP numarasını yazınız. **Port** bölümlerine de açmak istediğiniz port numarasını yazınız ve **Save Changes** butonuna tıklayınız.

NAT Rule - Add

NAT Rule Information

Rule Flavor: RDR

Rule ID: 6

IF Name: ppp-0

Protocol: TCP

Local Address From: 10 0 0 4

Local Address To: 10 0 0 4

Global Address From: 0 0 0 0

Global Address To: 0 0 0 0

Destination Port From: Any other port 4662

Destination Port To: Any other port 4662

Local Port: Any other port 4662

Save Changes **Close**

Network Address Translation (NAT) Rule Configuration

NAT Options: NAT Rule Entry

Rule ID	IF Name	Rule Flavor	Protocol	Local IP From	Local IP To	Action
1	ALL	NAPT	ANY	0.0.0.0	255.255.255.255	Stats
2	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
3	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
4	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
5	ppp-0	RDR	TCP	10.0.0.4	10.0.0.4	Stats
6	ppp-0	RDR	TCP	10.0.0.4	10.0.0.4	Stats

Add

After you have saved your changes, you must write the new settings to flash to make them permanent. Click the button below to do this.

Aynı işlemi UDP protokolü içinde aşağıdaki gibi




The image shows the 'NAT Rule - Add' configuration form in the Zoom web interface. The form is titled 'NAT Rule Information' and contains the following fields:

- Rule Flavor: RDR
- Rule ID: 7
- IF Name: ppp-0
- Protocol: UDP
- Local Address From: 10.0.0.4
- Local Address To: 10.0.0.4
- Global Address From: 0.0.0.0
- Global Address To: 0.0.0.0
- Destination Port From: Any other port 4672
- Destination Port To: Any other port 4672
- Local Port: Any other port 4672

At the bottom of the form, there are two buttons: 'Save Changes' and 'Close'.

Karşınıza aşağıdaki menü çıkacaktır. Burda son ilave ettiğiniz 7 numaralı NAT Rule görülecektir. Şimdi yaptıklarınızı kayıt etmek için **Write Settings to Flash** butonuna basın.

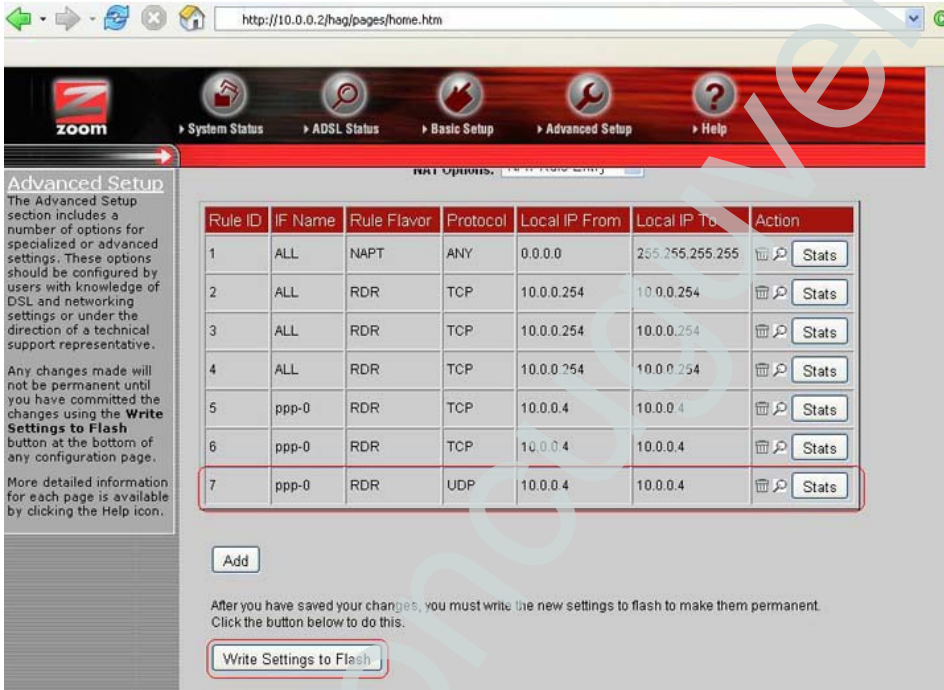

The image shows the 'Advanced Setup' page in the Zoom web interface. The page has a navigation bar with icons for System Status, ADSL Status, Basic Setup, Advanced Setup, and Help. The 'Advanced Setup' section is active, and the 'NAT Options' tab is selected. A table of NAT Rules is displayed, with the 7th rule highlighted in red. Below the table, there is an 'Add' button and a 'Write Settings to Flash' button.

Rule ID	IF Name	Rule Flavor	Protocol	Local IP From	Local IP To	Action
1	ALL	NAPT	ANY	0.0.0.0	255.255.255.255	Stats
2	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
3	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
4	ALL	RDR	TCP	10.0.0.254	10.0.0.254	Stats
5	ppp-0	RDR	TCP	10.0.0.4	10.0.0.4	Stats
6	ppp-0	RDR	TCP	10.0.0.4	10.0.0.4	Stats
7	ppp-0	RDR	UDP	10.0.0.4	10.0.0.4	Stats

After you have saved your changes, you must write the new settings to flash to make them permanent. Click the button below to do this.

Write Settings to Flash